



DES Z



Cable frame with brush

FEATURES

- Brush frame for cables with or without connectors
- Tidy and cost effective solution
- Available in three sizes (24, 16 and 10)

The DES Z series can be used for cables with or without connectors, when there is no need for liquid tightness and strain relief. Effective protection against dust and dirt.

Material: PC, halogens and silicones free

Flammability: self-extinguishing
acc. to UL94-V0

Temperature: -25°C... +80°C (static)


RELATED PRODUCTS

- DES Cover (page 28)
- HY360 hydraulic punch driver (page 162)
- PF cable entry system plates (page 164)



Model	Code	Dimensions (mm)		Max. cut-out (mm)	Pcs (/pack)
		L1	L2		
DES Z 24	1731060024	146	130	112 x 39	10
DES Z 16	1731060016	120	103	86 x 39	
DES Z 10	1731060010	99	83	63 x 39	

Dimensions (mm)

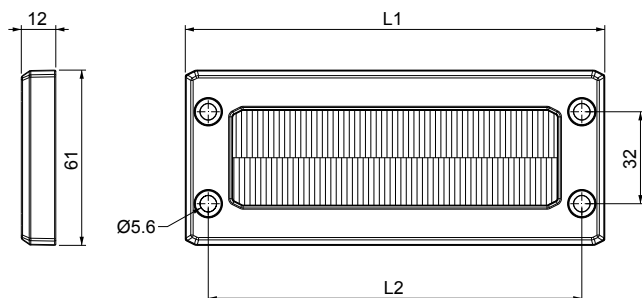

Splittable frame with double brush

FEATURES

- Brush frame for cables with or without connectors
- Double brush offering increased dust protection
- 8 different models [24, 16, 10, Q, L5, L4, L3 and L2]

The DES ZZ is a splittable frame with 2 rows of brushes.

The DES ZZ series can be used for cables with or without connectors, when there is no need for liquid tightness and strain relief. Effective protection against dust and dirt thanks to the double brush.

Material: PP+GF, halogens and silicones free

Flammability: self-extinguishing acc. to UL94-V0

Temperature: -25°C... +80°C (static)

RELATED PRODUCTS

- DES Cover (page 28)
- DES Flap (page 29)
- HY360 hydraulic punch driver (page 162)
- PF cable entry system plates (page 164)







Model	Code	Dimensions (mm)			Max. cut-out (mm)	Pcs (/pack)
		A	B	C		
DES ZZ-24	1731060224	146	130	61	112 x 39	1
DES ZZ-16	1731060216	120	103	61	86 x 39	
DES ZZ-10	1731060210	99	83	61	63 x 39	
DES ZZ-Q	1731060208	74	58	61	40 x 39	
DES ZZ-L5	1731060205	146	130	41,4	108 x 18	
DES ZZ-L4	1731060204	120	103	41,4	86 x 18	
DES ZZ-L3	1731060203	99	83	41,4	63 x 18	
DES ZZ-L2	1731060202	74	58	41,4	40 x 18	
Upon request	1731991020	Set of 4 mounting screws in AISI304 with Black Geomet finishing				

Dimensions (mm)

DES ZZ-L2 / DES ZZ-L3 / DES ZZ-L4 / DES ZZ-L5

DES ZZ-Q / DES ZZ-10 / DES ZZ-16 / DES ZZ-24

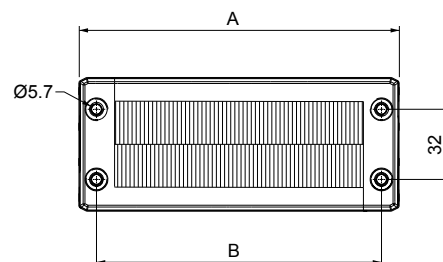



DESCCLICK Z



Divisible frame with single brush

FEATURES

- Without screws
- Metric threads M32 and M50
- Cost efficient solution
- Black version

DESCCLICK Z is a divisible frame with a single brush providing protection against dust and dirt.

Material: PC, halogens and silicones free

Flammability: self-extinguishing
acc. to UL94-V0

Temperature: -25°C... +80°C (static)

RELATED PRODUCTS

- HY360 hydraulic punch driver (page 162)
- Divisible locknuts (page 41)




Model	Code	Metric thread	Ø Max. cut-out (mm)	Pcs (/pack)
DESCCLICK Z 32	1731060332	M32 x 1,5	32,5	10
DESCCLICK Z 50	1731060350	M50 x 1,5	50,5	


Dimensions (mm)



DESCCLICK Z 32

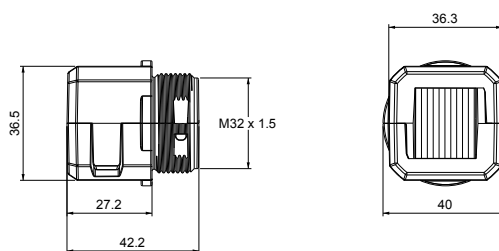

DESCCLICK Z 50

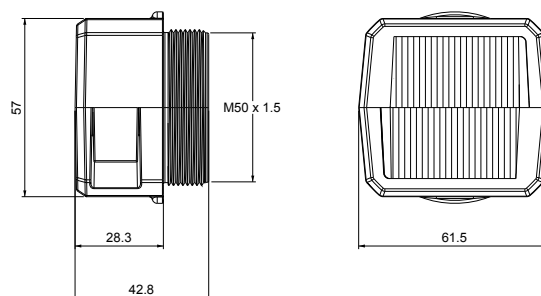

FEATURES

- Double brush frame for cables with and without connectors
- Frame screws in AISI304 Stainless Steel with Black Dacromet finishing
- Metric threads M32 and M63
- Double frame offering increased dust protection

DESPRED ZZ consists of a square frame with two rows of brushes. Excellent protection is offered against dust and dirt thanks to the double brush.

Material: PP+GF, halogens and silicones free

Flammability: self-extinguishing acc. to UL94-V0

Temperature: -25°C... +80°C (static)

RELATED PRODUCTS


- HY360 hydraulic punch driver (page 162)
- Divisible locknuts (page 41)



Model	Code	Metric thread	Ø Max. cut-out (mm)	Pcs (/pack)
DESPRED ZZ 32	1731060232	M32 x 1,5	32,5	1
DESPRED ZZ 63	1731060263	M63 x 1,5	63,5	

Dimensions (mm)

DESPRED ZZ 32

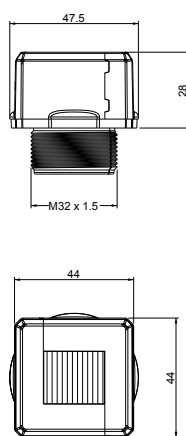

DESPRED ZZ 63

